

MH315

15 寸三分频两驱动点声源音箱

15" Three-way Bi-amp Point-source Loudspeaker

MH SERIES

应用范围 Application


- ▶ 剧场、音乐厅、礼堂、宴会厅、多功能类大厅、体育场馆主扩声
- ▶ Theater, Odeum, Auditorium, Banquet hall, Multi-function hall, FOH for Stadium

产品特性 Features

- ▶ MH315是一款拥有创新技术设计的点声源音箱，传承了MH系列体积紧凑、大动态表现和纯净的音质感特点；配置全新研发1.7寸高音单元，搭配高精度号角带来更好的延伸和更低的失真；采用全新8寸中音单元，配合通过优化设计中音相位塞，秉承着无压缩，无失真的设计准则，精确还原声音真实感；箱体内置15寸低音单元，采用带通式设计结构，坚固稳定，确保声音的动态和临场感；音箱通过精确的声学模拟，采用高精度设计的相位对齐调整技术，能够带来更宽更深更精准的声场表现。
- ▶ 箱体上设计了21个隐藏吊点，以满足各种扩声场合不同安装需求；同时还配置了2个力学优化式抽手，让搬运和快速搭建工作变得更加简易方便。
- ▶ MH315 is a point-source speaker with innovative technology design, inheriting MH series features of compact volume, large dynamic performance and pure sound quality. Equipped with new 1.7" HF unit of high precision horn, which to bring better extension and lower distortion. The new 8" MF unit, with the optimized design of MF phase plug, adheres to the design criteria of no compression, no distortion, accurately restore the sense of sound. The box has a built-in 15-inch LF unit, which adopts the band-pass design structure to ensure the dynamic sound and the sense of presence; Through precise acoustic simulation and high-precision phase alignment adjustment technology, the speaker produces wider, deeper and more accurate sound field performance. The box is designed with 21 hidden lifting points to meet the different installation requirements of various acoustic amplification occasions. It is also equipped with two mechanical optimization type pumping hand for easy installation.



产品尺寸 Product dimension

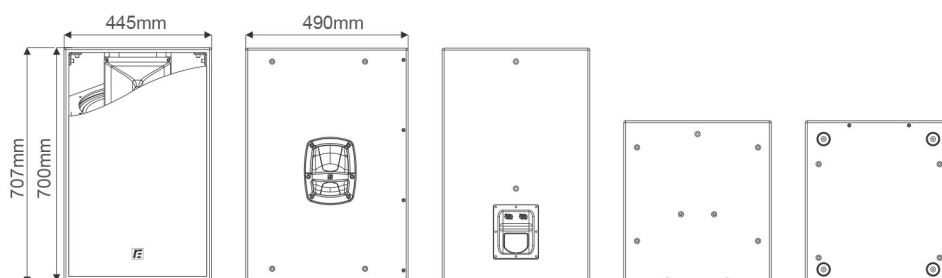

参数规格 Specifications

系统类型	15寸三分频两驱动点声源音箱	System type	15" Three-way Bi-amp Point-source Loudspeaker
频率响应	50Hz~19kHz(±3dB)/45Hz~19kHz(-10dB)	Frequency response	50Hz~19kHz(±3dB)/45Hz~19kHz(-10dB)
灵敏度(1w 1m)	MHF: 108dB; LF: 99.5dB	Sensitivity	MHF: 108dB; LF: 99.5dB
标称阻抗	MHF: 8Ω/LF: 8Ω	Nominal impedance	MHF: 8Ω/LF: 8Ω
额定功率(AES)	MHF: 300W/ LF: 500W	Power rating(AES)	MHF: 300W/ LF: 500W
低音单元	1×15寸铁磁低音(75mm音圈)	LF	1×15" ferrite LF (75mm voice coil)
中音单元	1×8寸钕磁中音(64mm音圈)	MF	1×8" neodymium MF (64mm voice coil)
高音单元	1×1.7寸铁磁高音(44mm音圈)	HF	1×1.7" ferrite HF (44mm voice coil)
覆盖角度(H×V)	60°×40°/90°×60°	Dispersion (H×V)	60°×40°/90°×60°
最大声压级(连续/峰值)	MHF:130dB/139dB; LF:123dB/129.4dB	SPL (Continue / Peak)	MHF:130dB/139dB; LF:123dB/129.4dB
吊挂硬件	M8吊点×21个	Flying kit	M8 ×21
连接方式	MHF:2+2-/LF:1+1-	Connection	MHF:2+2-/LF:1+1-
尺寸(H×W×D)	707×445×490mm	Dimension (H×W×D)	707×445×490mm
重量	25.8KG	Weight	25.8KG



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com

