

NOVI-SA

双12寸(带DSP)有源超低频音箱
Dual 12-inch subwoofer with DSP

NOVI SERIES


应用范围 Application

- 会议室、多功能厅的主扩声、会议厅、剧场的辅助扩声、阶梯教室、教堂、音乐厅扩声、小型流动演出、露天音乐喷泉及灯光秀扩声
- Main sound for Conference room, Multi-function hall, supporting fills for theater, entertainment room, restaurant room, small touring live show, Outdoor music fountain and lighting sound transmission.

产品特性 Features

- NOVI-SA是一款紧凑型双12寸倒相式有源超低频音箱，带DSP处理和4×2000W/4Ω功放模块，搭配新设计的气流倒相孔，有效提升了声压级并精心优化了调谐，减少了管内气流扰动噪声及摩擦，极小震动箱体结构；即使在大功率状态下也能稳定工作，并置放干净强劲超低频效果。
- 配置了两个力学优化式抽手，表面采用聚脲喷涂工艺，更结实耐磨，可搭配NOVI全频线阵音箱柱音箱堆叠组合使用，安装方便快捷，专为固定安装和小型流动扩声系统提供高清晰度解决方案。
- NOVI-SA is a compact double 12-inch inverted subwoofer, with the help of the DSP processing and 4×2000W/4Ω power amplifier module and combined with the newly designed airflow inverted hole, which effectively improves the sound pressure level, reduces the disturbance noise and friction of the air flow in the tube and minimizes the vibration of box.
- Two mechanical optimized drawing hands are arranged and the surface adopts polyurea spraying process, is more practical and wear-resistant, can be collocated with a NOVI full-frequency line array column speaker, is convenient and fast to install.

产品尺寸 Product dimension

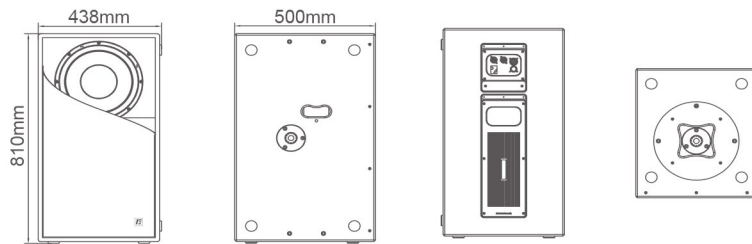

参数规格 Specifications

系统类型	双12寸(带DSP)有源超低频音箱	System type	Dual 12-inch subwoofer with DSP
灵敏度(1W/1m)	95dB	Sensitivity(1W/1m)	95dB
频率响应	40Hz-300Hz(±3dB)/35Hz-350Hz (-10dB)	Frequency response	40Hz-300Hz(±3dB)/35Hz-350Hz (-10dB)
标称阻抗	4Ω	Nominal impedance	4Ω
额定功率(AES)	1400W	Power rating(AES)	1400W
低音单元	2×12寸钕磁低音单元 (100mm)	LF	2×12" Neodymium magnetic driver(100mm)
最大声压级 (连续/峰值)	126dB/132dB	SPL (continuous/peak)	126dB/132dB
连接件	1×Neutrik NL4 Speakon四芯插座,OUT1/2(1+ 1-, 2+ 2-) 1×Neutrik NL4 Speakon四芯插座OUT2(1+ 1-) 2×Neutrik XLR IN/OUT ; 1×以太网口RJ45	Connectors	1×Neutrik NL4 Speakon OUT1/2(1+ 1-, 2+ 2-) 1×Neutrik NL4 Speakon OUT2(1+ 1-) 2×Neutrik XLR IN/OUT;1×EtherNet connector RJ45
4通道D类放大器模块(带DSP)	2×Neutrik Powercon IN/OUT	4-channel class D amp module with DSP	2×Neutrik Powercon IN/OUT
输出功率4Ω	2000W×4	Output power 4Ω	2000W×4
输出功率8Ω	1000W×4	Output power 8Ω	1000W×4
输出功率16Ω	600W×4	Output power 16Ω	600W×4
增益	32dB	Gain	32dB
信噪比S/N	115dB (A 计权)	S/N	115dB (weighted A)
远程监控	具有负载阻抗监控功能	Remote monitoring	load impedance monitoring function
工作电压范围	AC90-264V, 50/60Hz	Working voltage range	AC90-264V, 50/60Hz
尺寸(H×W×D)	810×438×500mm	Dimension(H×W×D)	810×438×500mm
重量	49kg	Weight	49kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,Shilou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com