

应用范围 Application

►会议室、多功能厅的主扩声、会议厅、剧场的辅助扩声、阶梯教室、教堂、音乐厅扩声、小型流动演出、露天音乐喷泉及灯光秀扩声

►Main sound for Conference room, Multi-function hall, supporting fills for theater, entertainment room, restaurant room, small touring live show, Outdoor music fountain and lighting sound transmission.

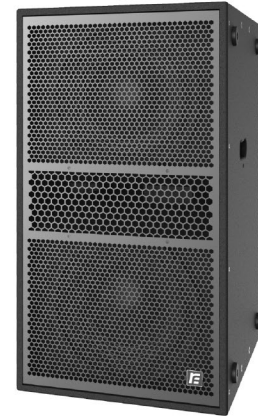
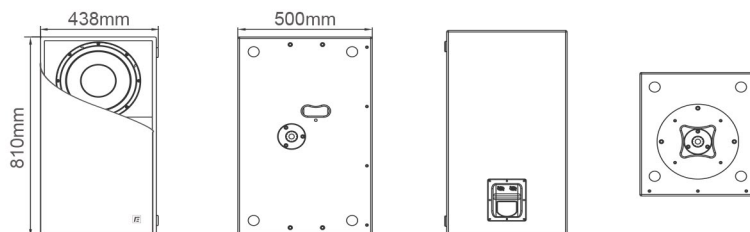
产品特性 Features

►NOVI-S是一款高端定位双12寸倒相式超低音箱，采用钕磁超低单元（100mm音圈）；配置新的气流倒相孔结构有效提升了声压级，并精心优化的调谐和减少了管内气流扰动噪声及摩擦；极小震动箱体结构，在大功率状态下能稳定工作，并重放干净强劲超低频效果，把低频下限延伸到35Hz。

►拥有轻巧紧凑型 and 便捷的操作性能设计，配置2个力学设计手柄，非常适合流动演出或是固定安装应用。

►NOVI-S is a high-end dual 12" inverted subwoofer with neodymium LF (100mm voice coil). The new-design air flow inverted structure improves the SPL, optimized cabinet structure designed to reduce unwanted resonance and airflow noise. Reinforced cabinet structure reduces internal vibration noise, which can work stably in high-power, and can replay clear and powerful ultra low frequency effect, and the low frequency can extend down to 35Hz.

►With super compact light-weight and user-friendly operating performance design, equipped with two mechanical design handles, which are very suitable for touring or fixed installation applications.

产品尺寸 Product dimension 参数规格 Specifications

系统类型	双12寸超低频音箱	System type	Dual 12" Subwoofer
频率响应	35Hz~350Hz(-10dB)	Frequency response	35Hz~350Hz(-10dB)
灵敏度(1W/1m)	95dB	Sensitivity	95dB
标称阻抗	4Ω	Nominal impedance	4Ω
额定功率(AES)	1400W	Power rating (AES)	1400W
低音单元	2×12寸钕磁低音单元 (100mm)	LF driver	2×12" neodymium LF (100mm voice coil)
最大声压级 (连续/峰值)	126dB/132dB	SPL(continue/peak)	126dB/132dB
连接件	2×NEUTRIK NL4MP四芯插座1+1-	Connectors	2×NEUTRIK NL4MP 4pin socket 1+1-
支撑硬件	M20支撑底座×2、圆盘连接预留位、堆叠侧板固定孔	Fittings	M20 pole×2、round plate positionside plate fixing pole
尺寸(H×W×D)	810×438×500mm	Dimension	810×438×500mm
重量	47kg	Weight	47kg

