

应用范围 Application


- ▶ 剧场、礼堂、宴会厅主扩声、大会议厅、多功能厅主扩声、流动演出、体育场馆主扩声、大型扩声系统辅助扩声
- ▶ Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application, Supporting large-scale sound reinforcement system fills



产品特性 Features

- ▶ VR18S是一款可悬挂单18寸线阵列低频音箱，配置了1个18寸大动态高声压级输出喇叭单元；箱体结构通过精密路径计算，减少了箱体内气流扰动噪声及摩擦，降低了低频的非线性失真，重放干净强劲超低频效果。
- ▶ 采用聚脲喷涂工艺，让箱体表面更结实耐磨；箱体两侧配置吊挂连接件，可以搭配VR15全频线阵组合吊挂或地面堆叠使用；音箱顶部设计了一个顶托支撑孔位，可以搭配全频音箱支撑组合使用；配置了四个力学优化式抽手方便搬运。
- ▶ VR18S is a suspendable single 18" line array subwoofer, configured with an 18" large dynamic high SPL output speaker unit; cabinet structure through the precision path calculation, reduces the airflow disturbance noise and friction in the cabinet, and reduces the low-frequency nonlinear distortion, and replays clean and powerful ultra-low frequency effect.
- ▶ The enclosure features polyurea spraying process, more sturdy and wear-resistant; on both sides of the cabinet configured with hanging connectors, can be matched with the VR15 full-frequency line array combination of hanging or ground stacked; the top of the speaker is designed with a top bracket support holes, can be matched with the full-frequency speaker support combinations; configured with four mechanical optimized drawers to facilitate the transportation.

产品尺寸 Product dimension

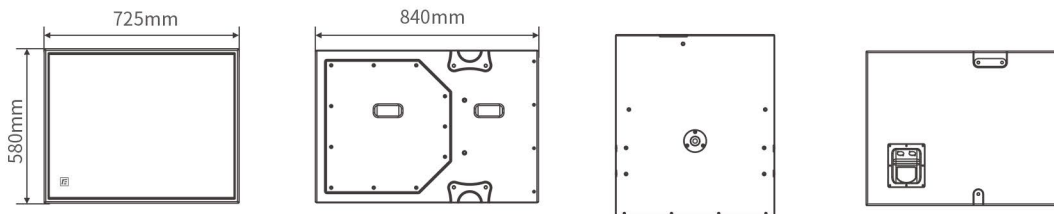

参数规格 Specifications

系统类型	单18寸超低音箱	System type	Single 18" Subwoofer
灵敏度(1w/1m)	102dB	Sensitivity(1W/1m)	102dB
频率响应	50Hz-300Hz(±3dB) 43Hz~300Hz(-10dB)	Frequency response	50Hz-300Hz(±3dB) 43Hz~300Hz(-10dB)
额定功率(AES)	1000W	Power rating(AES)	1000W
最大声压级(连续/峰值)	129dB/135.5dB	SPL(continue/peak)	129dB/135.5dB
标称阻抗	8Ω	Nominal impedance	8Ω
低音单元	1×18寸铁磁低音(100mm音圈)	LF	1×18" Ferrite(100mm voice coil)
总谐波失真	≤3%(42.5Hz-300Hz)	THD	≤3%(42.5Hz-300Hz)
连接方式	2×NEUTRIK NL4MP四芯插座, 1+1-	Connections	2×NEUTRIK NL4MP 4 PIN Socket, 1+1-
吊挂硬件	M8吊点×4, M10吊点×8	Fittings	M8 Hanging fittings×4, M10 Hanging fittings×8
尺寸(H×W×D)	580×725×840mm	Dimension(H×W×D)	580×725×840mm

